

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000659

International filing date: 24 February 2005 (24.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 0404403.8  
Filing date: 27 February 2004 (27.02.2004)

Date of receipt at the International Bureau: 01 April 2005 (01.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



PCT/432005/000659



INVESTOR IN PEOPLE


The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

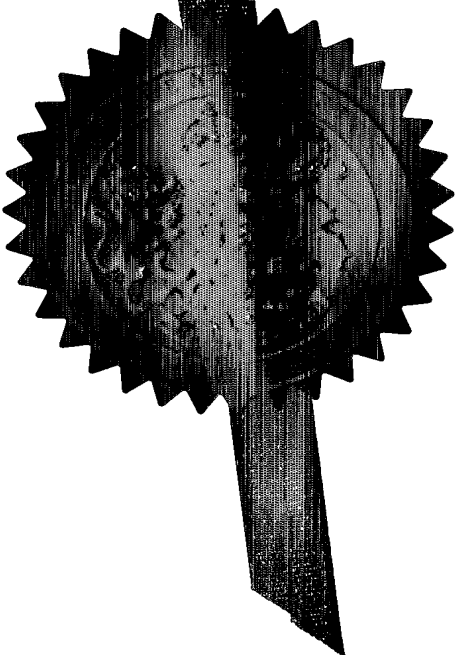

*Stephen Hordley*

Signed

Dated 21 March 2005






01MAR04 E876911-4 D02882  
F01/7700 0-00-0404403.8 ACCO  
UNT CHA -

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

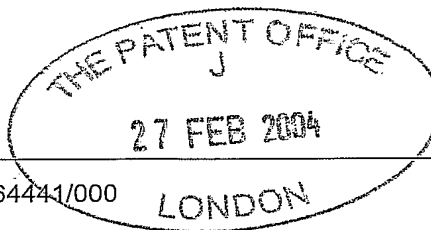

1. Your reference ACH/64441/000 27 FEB 2004

2. Patent application number  
(The Patent Office will fill this part in) 0404403.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)  
DISPERSE LIMITED  
40 ALAN TURING ROAD  
SURREY RESEARCH PARK  
GUILDFORD, SURREY GU2 6YF

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation UNITED KINGDOM

8047219003

4. Title of the invention DISPERSIONS

5. Name of your agent (if you have one) BOULT WADE TENNANT

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)  
VERULAM GARDENS  
70 GRAY'S INN ROAD  
LONDON  
WC1X 8BT

Patents ADP number (if you know it) 42001

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.

Country	Priority application number (if you know it)	Date of filing (day / month / year)
---------	--	-------------------------------------

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)

Number of earlier UK application	Date of filing (day / month / year)
----------------------------------	-------------------------------------

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request? YES

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Otherwise answer NO (See note d)

## Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 11

Claim(s) 2

Abstract

Drawing(s)

10. If you are also filing any of the following, state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) 3

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*) 0

Any other documents 0  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

27 February 2004

12. Name and daytime telephone number of person to contact in the United Kingdom 020-7430-7500

### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

DISPERSIONS

The present invention relates to a polyaphron dispersion.

5 A polyaphron dispersion is generally also known as a biliquid foam. This phrase is known, for example, from Sebba, F. (Felix), "Foams and biliquid foams, aphrons", 1987. ISBN: 0471916854. Biliquid foams are known in the art and are described in the following literature references by  
10 Sebba: "Biliquid foams", J. Colloid and Interface Science, 40 (1972) 468-474; and "The Behaviour of Minute-Oil Droplets Encapsulated in a Water Film", Colloid Polymer Sciences, 257 (1979) 392-396.

15 US-A-4,486,333 to Sebba describes a particular method for the preparation of biliquid foams by agitating a hydrogen bonded liquid containing a soluble surfactant to produce a gas foam and intermittently adding to the gas foam a non-polar liquid which is immiscible with the hydrogen bonded  
20 liquid, the surfactant-containing hydrogen bonded liquid being selected to provide a spreading coefficient equal to or greater than zero.

Known polyaphron dispersions contain a single liquid  
25 external phase and a single liquid internal phase. We have now discovered a polyaphron dispersion which can contain additional phases in the internal phase, and a process for the preparation thereof.

30 Accordingly the present invention provides a polyaphron dispersion comprising an external phase and polyaphrons having an internal phase, the internal phase comprising (i)

a first phase which is liquid and (ii) a second phase which is liquid or gaseous.

5 The process for preparing a polyaphron dispersion as defined above comprises (a) forming the internal phase and (b) forming a polyaphron dispersion comprising an external phase and the internal phase prepared in step (a).

10 The polyaphron dispersion preferably comprises from 70 to 95% by weight of the internal and 5 to 30% by weight of the external, or continuous phase. The external phase is preferably an aqueous phase. A surfactant to stabilise the dispersion may also be included, for example in an amount of from 0.1 to 3%, preferably 0.1 to 1%, by weight based on the  
15 total weight of the dispersion. Suitable surfactants are, for example, anionic, cationic, non-ionic, amphoteric or zwitterionic surfactants, such as sodium lauryl ether sulphates, polyethoxylated castor oil, ethoxylated oleyl alcohols or polyethoxylated hydrogenated castor oils.

20

The internal phase comprises at least two liquid phases or at least a liquid phase and a gas phase. The internal phase may, of course, also comprise additional phases, such as an additional liquid phase, an additional gas phase or an  
25 additional solid phase.

The internal phase may, for example, comprise an aqueous phase and a non-aqueous phase, an emulsion or a biliquid foam (or polyaphron dispersion). The internal phase may  
30 also comprise a single aqueous phase and a single non-aqueous phase.

When the internal phase comprises an emulsion, the emulsion is, for example, a water-in-oil emulsion. The continuous phase of the emulsion is immiscible with the external phase of the polyaphron dispersion. The emulsion may, for  
5 example, comprise from 10% to 80% of the non-continuous phase and from 20% to 90% of the continuous phase. Either or both of the continuous phase and the non-continuous phase may comprise one or more additives, particularly additives which are incompatible with components of the external phase  
10 of the polyaphron dispersion. Examples of suitable oil phases are those mentioned below with respect to the internal phase when it is a polyaphron dispersion. An emulsion may be prepared by a standard techniques known in the art, for example by use of a pair heated vessels in  
15 which the aqueous and non aqueous phases are prepared prior to final mixing and emulsification by means of a high shear device such as a rotor stator device of the 'Silverson' type.

20 When the internal phase comprises a biliquid foam or a polyaphron dispersion (which may itself be a complex polyaphron dispersion of the present invention), the external phase may be aqueous or non-aqueous. The external phase of this internal phase is different from the external  
25 phase of the polyaphron dispersion of the invention. The internal phase may comprise from 10% to 80% of the non-continuous phase and from 90% to 20% of the continuous phase. Either or both of the continuous phase and the non-continuous phase may comprise one or more additives,  
30 particularly additives which are incompatible with components of the external phase of the polyaphron dispersion. Examples of suitable oil phases are oils which

are liquid at room temperature (e.g. 20 degrees C) such as, for example, one or more selected from a cyclomethicone, dimethicone, dimethiconol, dimethicone copolyol, an emollient ester such as isopropyl stearate, lanolate, myristate or palmitate, or octyl palmitate, a glyceride such as avocado oil, coconut oil, soybean oil or sunflower oil, or a caprylic/capric triglyceride, a lanolin oil, mineral oil or natural oil, or oleyl alcohol, or any other oil known to be used in emulsions for whatever purpose. Also included in the definition of oil are water insoluble solvents such as hexane, toluene, benzene, kerosene, diesel oil and other like solvents and water-insoluble organic liquids. The biliquid foam or polyaphron dispersion may be prepared by a standard techniques known in the art, for example by those indicated herein.

When the internal phase comprises a single aqueous phase and a single non-aqueous phase, it may be prepared by forming an unstable emulsion or polyaphron suspension, which is subsequently allowed to separate into two components on standing once the polyaphron suspension of the present invention is fully formed.

The external and/or internal phase of the polyaphron dispersion may, for example, comprise one or more surfactants or other additives. Suitable surfactants for forming and stabilising biliquid foams or polyaphrons can be selected for example, from the list given in WO 97/32559 or will be well-known to those skilled in the art.

Methods of producing biliquid foams are described in US-A-4,486,333 involving the preliminary formation of a gas foam

in order to provide a sufficiently large surface area on which the biliquid foam can subsequently be formed. It has been found that the prior formation of a gas foam is not required to manufacture a stable biliquid foam, provided  
5 that a suitable stirring mechanism is provided in the manufacturing vessel..

Such an apparatus comprises a tank provided with a stirrer in which the stirrer blade breaks the interface between the  
10 liquid and air and provides low shear mixing throughout the whole of the volume of the biliquid foam throughout the whole of the production process. A delivery device is provided through which the internal phase of the dispersion, which in this case comprises at least two liquids, is  
15 delivered to the tank. The design of the delivery device is such that the rate of addition of the internal phase fluid can be controlled and varied during the production process. A feature of the production process is that the internal phase is added to the stirred external phase slowly at first  
20 until sufficient droplets have been formed to constitute a large, additional surface area for the more rapid formation of new droplets. At this point, the rate of addition of the internal phase may be increased.

25 The production process preferably comprises the following steps:

1. The addition of one or more chosen surfactants to one or other or both phases (as previously determined by experiment).

2. The charging of the external phase into the bottom of a process vessel.

3. The incorporation of the stirrer into the vessel so that it stirs the surface of the external phase.
4. Adjustment of the stirrer speed to a previously determined level.
5. The slow addition of the internal phase whilst continuing to stir at the prescribed speed.
6. The speeding up of the rate of addition of the internal phase once a prescribed amount (usually between 5% and 10% of the total amount to be added) has been added.

The stirring rate and the rate of addition of the internal phase are variables, the values of which depend upon the detailed design of the manufacturing plant (in particular, the ratio of tank diameter to impeller diameter), the physico-chemical properties of the internal phase and the nature and concentrations of the chosen surfactants. These can all be pre-determined by laboratory or pilot plant experiment.

It will be understood by those skilled in the art that other manufacturing methods for the polyaphron dispersion may be used, as appropriate.

25

Colloidal gas aphrons are known in the art as, for example, described by Sebba in "Foams and biliquid foams, aphrons", 1987. ISBN: 0471916854. Such colloidal gas aphrons containing a gas such as air, nitrogen, carbon dioxide or a reactive gas such as oxygen or hydrogen may constitute the internal phase of the current invention. Colloidal gas aphrons may be prepared as described in the stated reference

or by a sparging process, which may include the use of a porous material through which the gas is injected into a suitably prepared water insoluble medium containing surfactants. Alternatively, the gas may be injected into a water-insoluble medium having a sufficient viscosity and or yield value to prevent the agglomeration of individual gas bubbles until the polyaphron dispersion of the present invention is fully prepared.

In one application of the invention, there is produced a food product such as a rich and creamy yoghurt type food product wherein the external phase is aqueous and may contain water soluble flavours, fruit extracts or particles of fruit, water-soluble colouring agents and the like, whereas the internal phase comprises an edible oil (preferably non fattening) such as olive oil or sunflower oil or avocado oil and an internal water phase which may be as high as 80% of the total internal phase concentration. The total concentration of the complex internal phase may be as high as 95% but is preferably about 90%, at which concentration the product has a rich and creamy appearance and taste because of the high concentration of the internal phase. In this manner is produced a low fat, high water content food product containing about 72 - 80% water phase.

In another application there is produced a no self-heating preparation consisting of two or more chemicals capable of undergoing an exothermic reaction when mixed where at least two of the reactants are water-soluble. In this application, at least one reactant is contained in the internal phase and another in the external continuous phase. The composition is such that the reacts do not mix and do

not, therefore, undergo an exothermic reaction until the two aqueous phases are mixed during use. By this means, a self-heating composition such as a cosmetic or pharmaceutical composition, preferably in the form of a cream, may be  
5 produced providing the reactants are not harmful to human skin. Other uses for self-heating preparations (for example, hard surface and drain cleaning products) will be obvious to those skilled in the art. A suitable exothermic reaction might be the interaction of calcium oxide,  
10 suspended in a non aqueous phase, and water contained in one of the other phases.

By a logical extension of the preceding application, if the reactants described are chosen to be endothermic, than self-  
15 cooling products may be formulated utilising the present invention.

Further examples of use of reacting species separated in the two aqueous phases until used include the formulation of  
20 adhesive products wherein at least one aqueous phase contains a suitable adhesive precursor such as a polymer and the other at least one initiator species.

In a similar manner, the present invention allows there to  
25 be used a colour change reaction (such as, for example, a reaction using a pH sensitive dye, such as bromothymol blue on the one hand and an acid or base solution on the other).

In yet a further application, the two aqueous phases may be  
30 used to keep separate two materials which are mutually incompatible until the moment of use. An example would be the delivery vehicle for two drugs which would precipitate

out of solution when combined together (as might be the case, for example, is one drug was anionic in character and the other cationic).

- 5 The present invention is now further described in the following Examples.

#### EXAMPLES

##### 10 PREPARATION OF WATER IN OIL EMULSIONS

###### Preparation Example 1

- 15 A "water in oil" emulsion was prepared from the following ingredients.

Ingredients	Weight (g)	%
<b>Aqueous Phase</b>		
1% Sodium chloride in demineralised water	50	50
<b>Oil Phase</b>		
Dow Corning 5200 formulation aid	4.0	4.0
Medium viscosity white mineral oil	46	46
Total	100	100

- 25 The water in oil emulsion was prepared in a 250ml Beaker with a diameter of 6.5cm. The aqueous phase was added to the oil phase while being stirred at approximately 2000rpm for 15 minutes with an impeller of diameter 5.5cm.

## Preparation Example 2

A "water in oil" emulsion was prepared from the following ingredients.

5	Ingredients	Weight (g)	%
	<b>Aqueous Phase</b>		
	1% Sodium chloride in demineralised water	100	50.0
	<b>Oil Phase</b>		
10	Dow Corning 5225c formulation aid	7.40	3.70
	Phenyl trimethicone	92.6	46.3
	Total	200	100

The water in oil emulsion was prepared in a 500ml Beaker with a diameter of 6.5cm. The aqueous phase was added to the oil phase while being stirred at approximately 4500rpm for 10 minutes with a rotor stator.

## 20 Preparation of Complex Biliquid foams

### Example 1

25	Ingredients	Weight (g)	%
	Preparation 1	90	90
	PEG 40 Castor Oil	1.0	1.0
	Demineralised water	8.9	8.9
	Methyldibromo Glutaronitrile	0.1	0.1
30	(and) Phenoxyethanol (preservative)		
	<b>Total</b>	100	100

The PEG 40 castor oil and the preservative were dissolved into the water in a 250ml Beaker. Preparation 1 was then added to the beaker dropwise, at first, with a stirrer speed of 350rpm and an impeller of diameter 5.5cm. As more of preparation 1 was added, the impeller speed was reduced and the rate of addition increased, until total addition of preparation 1 and a stirrer speed of 150rpm.

#### Example 2

10

Ingredients	Weight (g)	%
Preparation 2	180	90
Laureth-7	1.8	0.9
15 Sodium Laureth sulphate	2.0	0.1
Demineralised water	17.8	8.9
Diazolidinyl urea, Iodopropynyl butylcarbamate, Propylene glycol (preservative)	0.2	0.1
20 Total	100	100

The Laureth-7, sodium laureth sulphate and preservative were added to the water and mixed gently in a 500ml beaker with a flat bladed stirrer. Preparation 2 was then added to the beaker dropwise, at first, with a stirrer speed of 200rpm. The stirrer speed was reduced as more of preparation 2 was added.

30

CLAIMS

1. A polyaphron dispersion comprising an external phase  
5 and polyaphrons having an internal phase, the internal phase  
comprising (i) a first phase which is liquid and (ii) a  
second phase which is liquid or gaseous.

2. A polyaphron dispersion according to claim 1 wherein  
10 the external phase is aqueous.

3. A polyaphron dispersion according to claim 1 or 2  
wherein the internal phase comprises at least two liquid  
phases.  
15

4. A polyaphron dispersion according to any one of claims  
1 to 3 wherein the internal phase comprises an aqueous phase  
and a non-aqueous phase.

20 5. A polyaphron dispersion according to claim 4 wherein  
the internal phase comprises a single aqueous phase and a  
single non-aqueous phase.

6. A polyaphron dispersion according to any one of claims  
25 1 to 4 wherein the internal phase comprises an emulsion.

7. A polyaphron dispersion according to any one of claims  
1 to 4 wherein the internal phase comprises polyaphrons.

8. A polyaphron dispersion according to any one of the preceding claims wherein the internal phase additionally comprises a solid phase.

5 9. A polyaphron dispersion according to any one of the preceding claims wherein the internal phase comprises at least 60 wt% of an aqueous phase.

10 10. A polyaphron dispersion according to any one of the preceding claims wherein a component of the external phase is capable of reacting with a component of the internal phase upon the polyaphrons being disrupted or destroyed.

11. A process for preparing a polyaphron dispersion as  
15 defined in any one of the preceding claims which comprises:

- a. forming the internal phase; and
- b. forming a polyaphron dispersion comprising an external phase and the internal phase prepared in step a.

